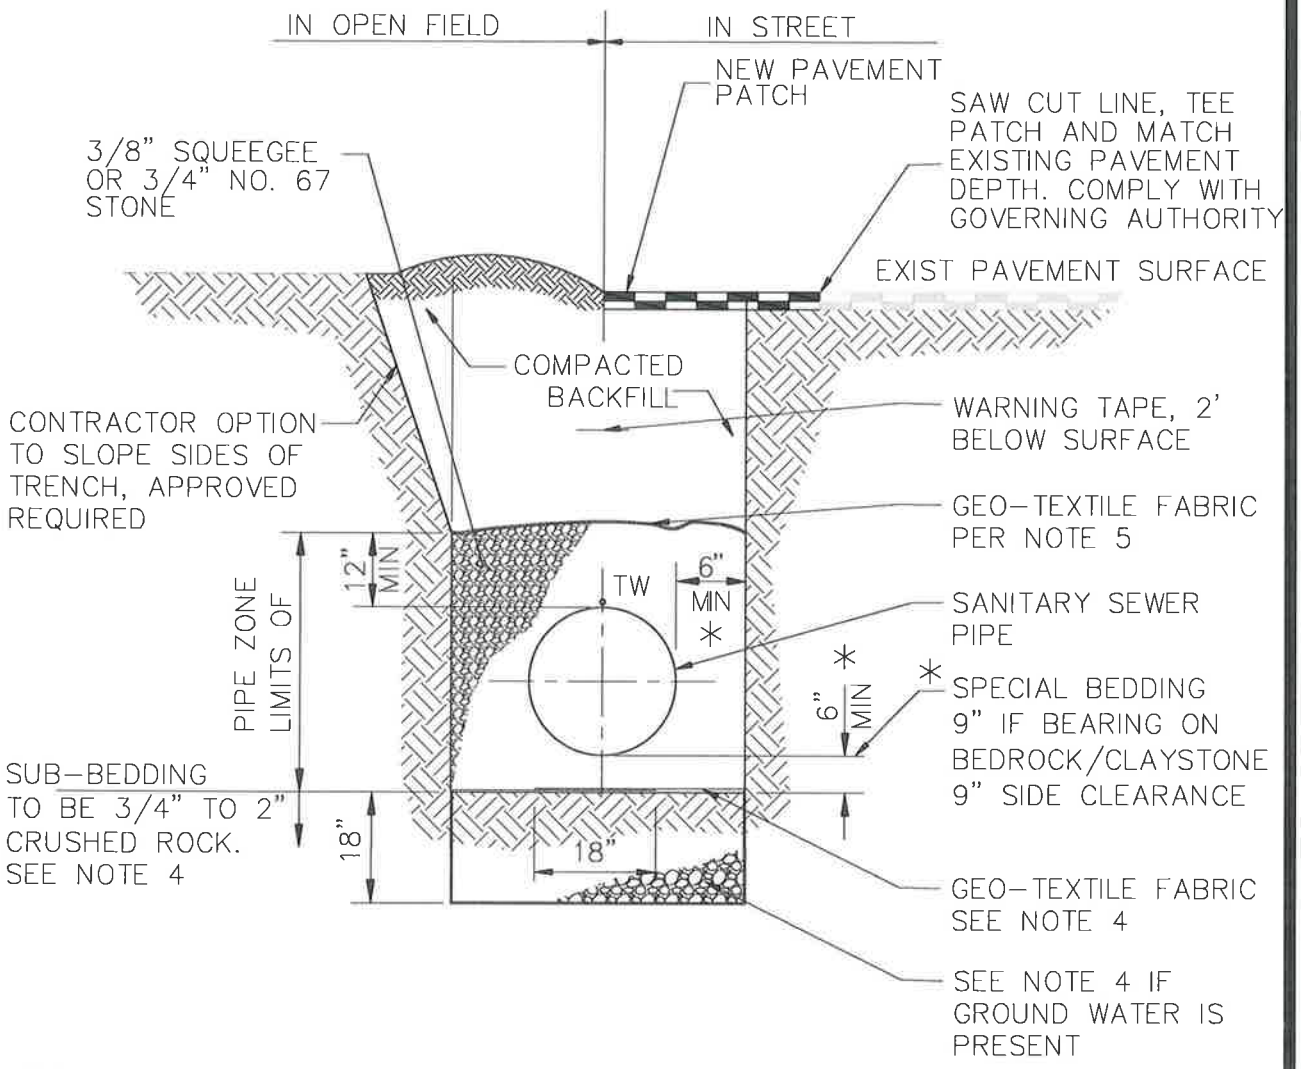

PIPE BEDDING AND BACKFILL NOTES:

1. TRENCH WALLS TO BE SUPPORTED AS REQUIRED BY OSHA.
2. TRENCH BACKFILL SHALL CONTAIN NO ROCKS/STONES LARGER THAN 4" IN DIAMETER.
3. HAND COMPACTION IS REQUIRED AROUND ALL MANHOLES, DISTRICT APPURTENANCES, AND ALL OTHER GROUND OBSTACLES.
4. IF GROUND WATER IS PRESENT AND UNSUITABLE/UNSTABLE SOIL IS ENCOUNTERED, SUB-BEDDING AND GEO-TEXTILE FABRIC IS REQUIRED. IF GROUND WATER AND STABLE SOIL IS PRESENT, INCREASE DEPTH AS SHOWN USING NO. 67 BEDDING PER ENGINEERING EVALUATION AND APPROVAL.
5. GEO-TEXTILE FABRIC TO COVER GRANULAR BEDDING MATERIAL, NO. 67.
6. TAPE TRACER WIRE (TW) TO TOP OF PIPE.

DATE 10/25/2019	VALLEY SANITATON DISTRICT	STANDARD AND SPECIAL BEDDING DETAIL
DRAWING D.3S		