

CONCRETE COLLAR CAST
AROUND VALVE BOX
(SIMILAR IN FIELD)

24" DIA COVER

PAVEMENT

18" ±


8"

TRACE WIRE VIEW
BEHIND MH ON
EXTERIOR WALL

20" X 20" CONCRETE
PAD WITH 3" HOLE,
W/2-#4 EACH WAY
(4,000 PSI CONCRETE)

10GA TRACE WIRE,
TAPED TO EXTERIOR OF
MH, RUN TO 6" COMMON
CI SHORT VALVE BOX,
LABEL SEWER.

PRECAST RISER AND
ECCENTRIC CONE

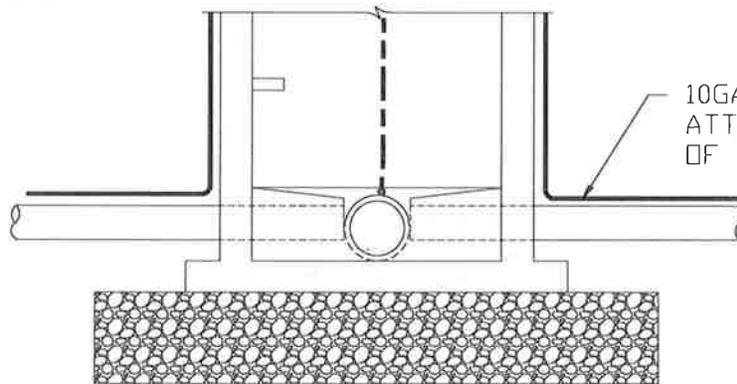

NOTES:

1. SUPPLY 2 EXTRA FEET OF TRACE WIRE IN COMMON SHORT VALVE BOX.

DATE
10/25/2019

DRAWING
D.18S

VALLEY
SANITATION DISTRICT

TYPICAL
PRECAST MANHOLE
TRACE WIRE PLACEMENT
DETAIL